





FEATURES:

- The look of natural ledgerstone with consistent dimensions for fast installation
- 24 unique wall textures
- Four additional 4-sided blocks can be used for corners, top blocks, step returns, and freestanding walls
- Engineerable wall system with capabilities of 5-6 foot gravity walls with optimal site conditions
- 3 Colours available: **Charcoal**, **Sandstone Buff**, **Light Grey**



PACKAGING:

- **Walling Blocks:** 1.67m²/pallet
1805 ± kg/pallet
4 blocks/pallet
24 unique textures

4x



- **Coping / Corners Blocks**

- 1.34m²/pallet
1460 ± kg/pallet
4 blocks/pallet
24 unique textures

4x



610 kg

1830 x 305 x 510 ± mm



490 kg

1530 x 305 x 510 ± mm



405 kg

1220 x 305 x 510 ± mm



300 kg

920 x 305 x 510 ± mm



1372 x 305 x 660 ± mm



1170 x 305 x 535 ± mm




1095 x 305 x 510 ± mm



914 x 305 x 610 ± mm

TYPICAL GRAVITY WALL SECTION 1:40


For reference only. Refer to Grand Ledge Installation Manual for detailed instructions. Final designs must be prepared by a professional engineer.

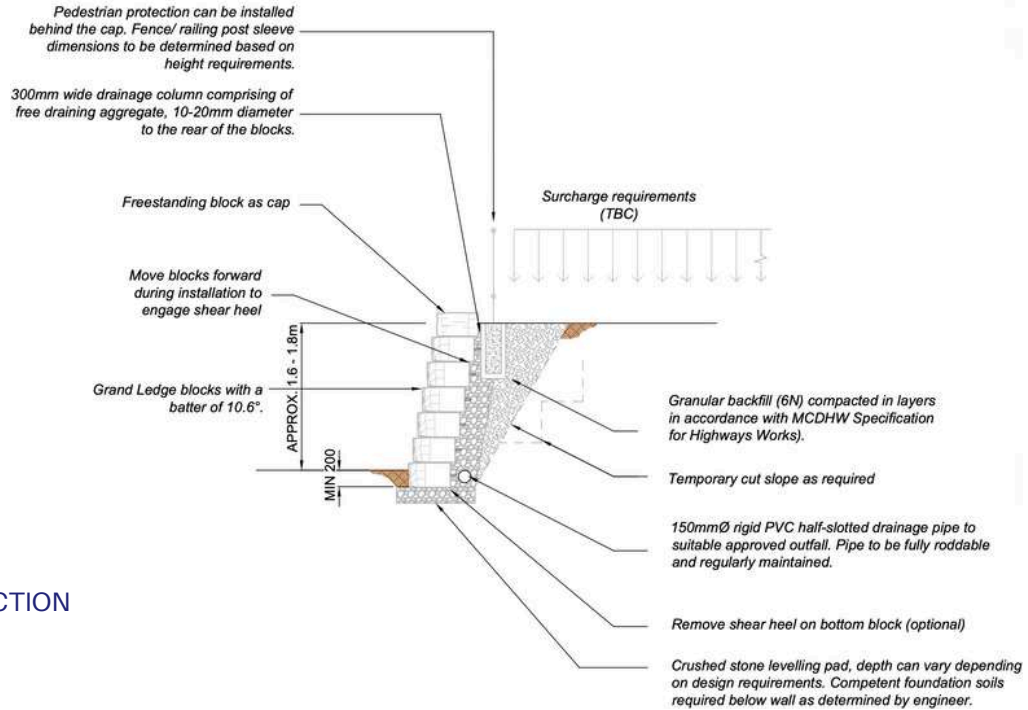

PRELIMINARY

NOT FOR CONSTRUCTION

TYPICAL REINFORCED WALL SECTION (GENERALLY 4 FT. AND TALLER)

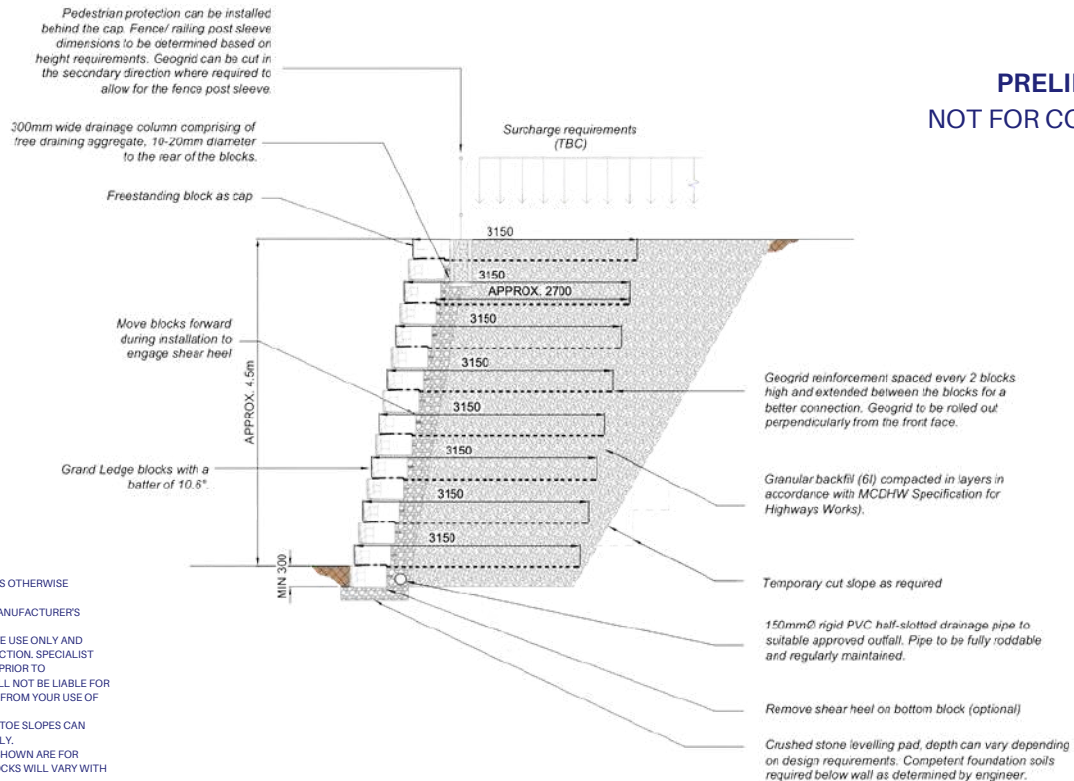

PRELIMINARY

NOT FOR CONSTRUCTION

- 1) ALL DIMENSIONS IN mm's UNLESS OTHERWISE SPECIFIED
- 2) FOR INSTALLATION REFER TO MANUFACTURER'S INSTALLATION GUIDE
- 3) THIS DRAWING IS FOR INDICATIVE USE ONLY AND MUST NOT BE USED FOR CONSTRUCTION. SPECIALIST DESIGN ADVICE MUST BE SOUGHT PRIOR TO CONSTRUCTION. GEOMAN LTD. WILL NOT BE LIABLE FOR ANY LOSS OR DAMAGE RESULTING FROM YOUR USE OF OR RELIANCE ON THIS DRAWING.
- 4) GROUND CONDITIONS & CREST/ TOE SLOPES CAN CHANGE THE DESIGN SIGNIFICANTLY.
- 5) BLOCK SIZES AND PLACEMENT SHOWN ARE FOR REFERENCE ONLY. INDIVIDUAL BLOCKS WILL VARY WITH PLACEMENT PATTERN.

